


maze Micro Sprayer Kit

Components

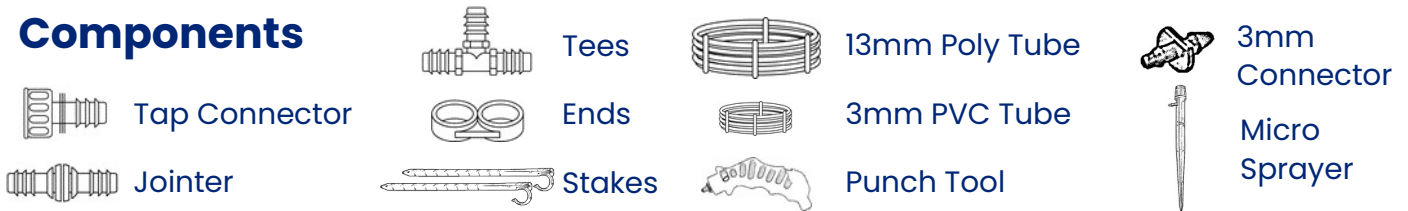

1. Connecting your polytube


First uncoil the polytube and lay it out so it will become easier to position and weave in your garden. Connect the tap connector to your tap, then connect one end of the polytube to the tap connector. You will note these fittings have 3 barbs (see pic on the right) which means you do not need a ratchet clamp as the polytube will not slip off the connector. However, this does mean it can be difficult to get the polytube onto the fitting. The polytube can be softened by placing the end in very hot water. After it has been in the water for a minute you can push the connection on more easily.



2. Layout of Polytube


The layout of your garden will determine the best way to lay out the polytube. Below are some popular options, however as the sprayers are connected with 3mm tubing, you may simply want to run the polytube in a direct line and evenly space out each sprayer. Or they can be sporadically placed based on where your plants are or how much water is need in certain spots.

The pipe can be fixed to the ground with stakes provided. It can also be placed under mulch in a garden bed. You can use the Joiner and Tee fittings to join to other pipes or run offshoots with the Tee.

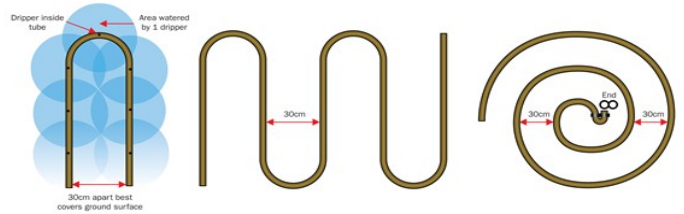

3. Connecting Sprayers

- Step 1. Trim 3mm tubing to desired length (if needed)
- Step 2. Insert smaller end of 3mm connector onto the end of 3mm tubing (see images 1 & 2).
- Step 3. Attach other end of tubing into the sprayer (see images 3 & 4)
- Step 4. Once you decide where you want the sprayers, use the Punch Tool and press firmly into the polytube until a hole is made (see image 5).
- Step 5. Then press the exposed (larger) end of the 3mm connector into the polytube until it's firmly inside (Image 6 & 7). Then insert spike end of the sprayer into your garden in your desired location.
- Step 6. Water flow and spraying radius can be adjusted by turning the cover of each sprayer

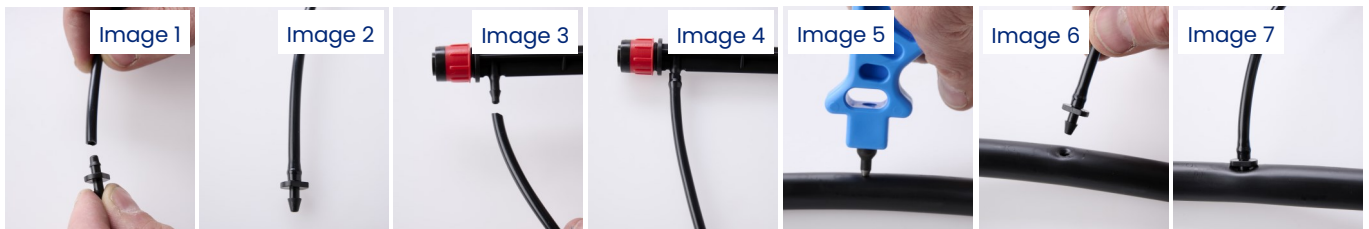

4. Closing off the end

Once the sprayers are in place you can cut off any extra which is not needed and close the end of the polytube. This is done by using the Line End fitting. Throat the polytube into one of the holes in the fitting then bending the tube and inserting into the other hole (see pic on the right).

This way it can be easily opened if you want to connect to another fitting or flush out to clean. Multiple ends are supplied although you may only need one.

